



Synthetic Type Medium High Performance Filter

# MiraDeep Borsa

- Available in efficiencies M6, F7, F8 and F9
- Long life, high dust holding capacity
- Aerodynamically designed pocket configuration
- Synthetic media with sturdy construction
- Easy installation
- Available for header size 21mm and 25mm

### Specification

Nominal Size W×H×D (in)	Actual Size W×H×D (mm)	No. of Pockets	Rated Air Flow CMM / CFM	Rated Initial Resistance (Pa)				Final Resistance (Pa)
				M6 60-65% MERV 11	F7 80-85% MERV 13	F8 90 - 95% MERV 14	F9 > 95% MERV 15	
24x24x36	594x594x900	10	56 / 2000	65	75	85	95	450
24x24x36	594x594x900	8	56 / 2000	50	60	65	72	
24x24x36	594x594x900	6	56 / 2000	55	65	70	77	
12x24x36	289x594x900	4	28 / 1000	50	60	65	72	
12x24x36	289x594x900	3	28 / 1000	55	65	70	77	
24x24x30	594x594x750	10	56 / 2000	65	70	85	95	
24x24x30	594x594x750	8	56 / 2000	55	65	78	86	
24x24x30	594x594x750	6	56 / 2000	60	75	90	100	
12x24x30	289x594x750	5	28 / 1000	65	70	85	95	
12x24x30	289x594x750	4	28 / 1000	55	65	78	86	
12x24x30	289x594x750	3	28 / 1000	60	75	90	100	
24x24x21	594x594x530	10	56 / 2000	90	95	135	149	
24x24x21	594x594x530	8	56 / 2000	85	105	130	143	
24x24x21	594x594x530	6	56 / 2000	90	120	140	154	
12x24x21	289x594x530	5	28 / 1000	90	95	135	149	
12x24x21	289x594x530	4	28 / 1000	85	105	130	143	
12x24x21	289x594x530	3	28 / 1000	90	120	140	154	
24x24x15	594x594x380	8	56 / 2000	80	130	145	160	
12x24x15	289x594x380	4	28 / 1000	80	130	145	160	
24x24x15	594x594x380	6	56 / 2000	85	135	180	200	
12x24x15	289x594x380	3	28 / 1000	85	135	180	200	

Measurement method : ASHRAE 52.1 & 52.2 EN779

Inflammability : UL Class 900 Other sizes are available upon request

Initial Resistance +/-10%


### Operating Condition

Operating Temperature	70°C
Usage Humidity Limit (continuous)	95%RH

### Material

Header	Galvanized steel (Single Header)
Media	Synthetic Fiber

### Outer Dimension Diagram

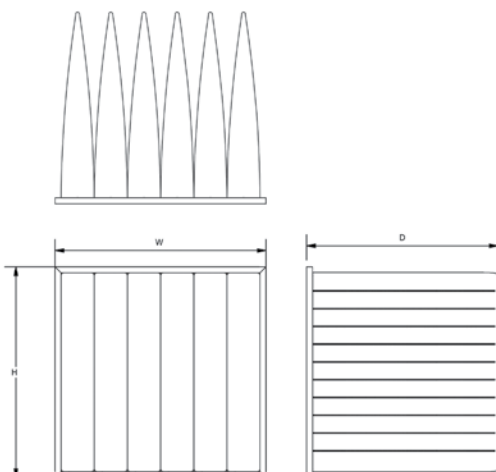

### Initial Resistance for MiraDeep Borsa

