



Metal Type Pre-filter

Grease Filter

- Standard, permanent type, metal washable filters
- For air or Grease Applications
- G2 class as per EN779
- Multiple layers of corrugated Aluminium or Stainless steel
- Available as standard 1", 2" & 4" depths
- Customize frames & other sizes are possible
- Completely washable

Specification

Nominal Size W×H×D (in)	Actual Size W×H×D (mm)	Air Flow (CMM/CFM)		Resistance (Pa)	
		@2.5 m/s	@3.2 m/s	Initial	Final
12x24x2	290x594x44	28 / 1000	35 / 1250	25@2.5 m/s	100
24x24x2	594x594x44	56 / 2000	70 / 2500		


Measuring method : EN779
 Other sizes are available upon request
 Inflammability: UL Class 900

Initial Resistance +/-10%

Material And Operating Condition

Cellside / Frame	Stainless Steel
Media	Stainless Steel, Aluminium (Multiple layers of corrugated Aluminium or Stainless steel)
Maximum Operating Temperature	up to 300°C

Airflow Resistance

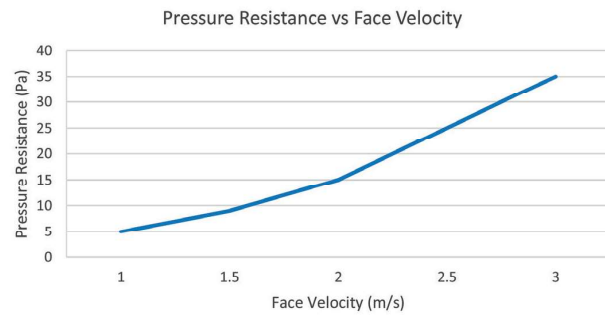

* Filter size: 24x24x2"